


A1 shell

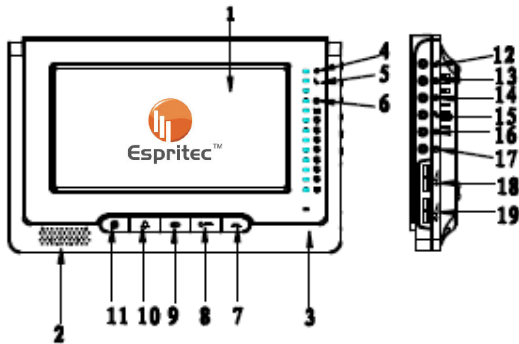

Picture

1. Display Screen
2. Loudspeaker
3. Microphone
4. Power LED
5. Busy LED
6. Do not Disturb LED
7. Intercom Button
8. Door - Release Button
9. Monitor Button
10. Inner call button
11. Do not Disturb Button
12. TV (N/A)
13. Take a Picture (N/A)
14. Return Button (N/A)
15. Function Button
16. Adjust Upon Button (+)
17. Adjust Down Button (-)
18. Adjust Ring Tone Volume
19. Talking Volume

Basic Operation Manual

Model: AR462B - TC + A1*

Operation

When Receiving a Call

The visitor will press the call button on the outside door station which will ring the intercom, from there you will be able to see the visitor on the monitor screen.

Press the intercom button(7) on the room station to talk with the visitor for a maximum 90 seconds, pressing the door release button (if an electric latch has been installed to your entry door) will unlock the door near the door station, if you want to end the call you can press the intercom button twice or it will ring out after approximately 40 seconds.

How to adjust settings

You are able to adjust the settings of the intercom (which include the brightness level, contrast, colour, audio volume).

To adjust the Ring Tone volume or the Intercom volume, adjust the desired setting by the function button (15) on the side.

Press the "Function"(15) button on the side to open the display screen, then press then adjust by pressing +Up(16) or -Down(17) button to adjust the settings of choice. Pressing the "Function" button or waiting 10 seconds will return back to the monitor state and then press "Function" again to return back to the display screen

Warranty

This product is guaranteed against faulty workmanship for up to 12 months from the date of installation. You are entitled to receive the replacement of intercom once an inspection has been made by an authorized person.

This Warranty will become **VOID** if the intercom has been tampered with, damaged, repaired by an unauthorized person or becomes faulty from improper use

*Product specifications and design subject to change without notice

Contact Us

Esprit Network Pty Ltd
5/128 Station Road, Seven Hills NSW
2147 Australia
Telephone: (02) 86784989
(Toll Free) 1800 24 27 27

Email: espritnetwork@gmail.com